



ACO Pacific, Inc.
2604 Read Ave., Belmont, CA 94002, USA


7020
Low Noise Microphone
200 Vdc Polarization

WEB: www.acopacific.com e-Mail: sales@acopacific.com


Tel: 650-595-8588 Fax: 650-591-2891

SPECIFICATIONS

- **Frequency Response:**
2 Hz to 10 kHz +/- 2 dB Free Field
- **Sensitivity:**
-20 dBV/Pa (100 mV/Pa)
- **Dynamic Range:**
0 dBA to 130 dB SPL
-10 dB SPL @ 1 kHz 1/3 Octave
- **Polarization Voltage:** 200 Vdc
- **Long Term Stability:** >250 Years/dB
- **Temperature Coefficient:** +/- 0.01 dB/C
- **Mechanical:**
Diameter: 23.77mm
Height; 19.4 mm w/grid
Mounting Thread: 23.11 mm 60UNS
- **Companion Preamp:** 4022 (4012+AD0122)



Observed 1/3 Octave Noise Floor

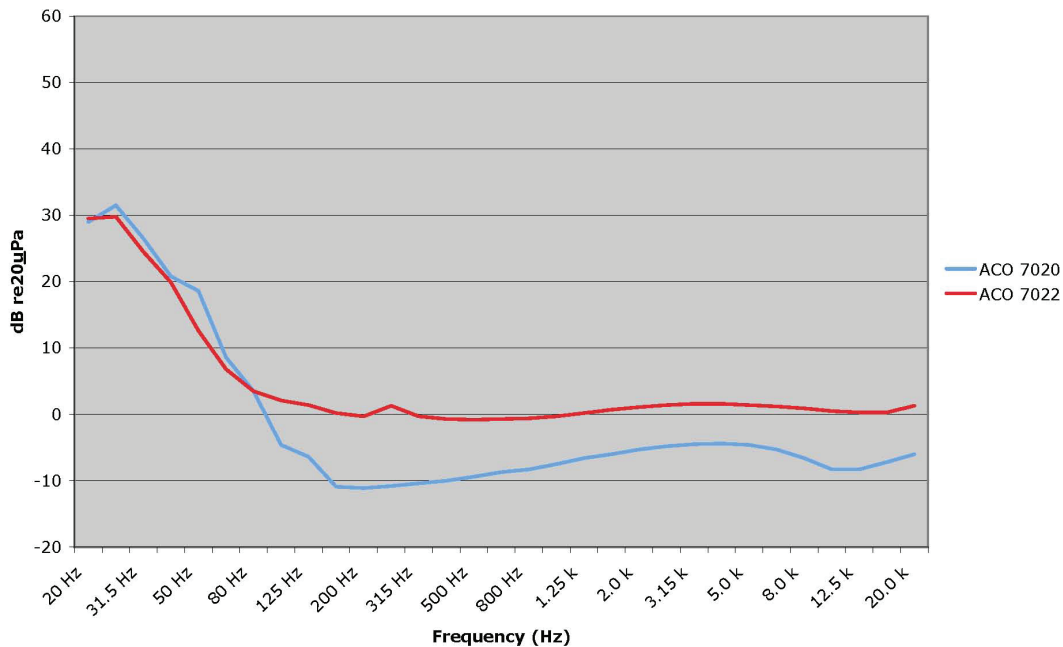

ACOustics begins with ACO™

DS7020-20110209revA